

# SPEAKER SYSTEMS

38cm(15") High-Power Speaker

## WS-AT300




### Input terminals




(Parallel Neutrik Speakon™ and 1/4 TRS phone jack input connectors)

- 2-Way 38cm(15") bass reflex speaker system
- Smooth response with high power handling capacity (continuous program/RMS), 400 W/200 W
- High-frequency driver utilizes new SCWG (Square Contour Wave Guide) horn.
- High impact molded resin enclosure.
- Six-sided trapezoidal design with built-in handle.
- Also be used as floor monitor and has built-in stand adapter
- Equipped with thermal protection circuit
- Has both Neutrik Speakon™ and 1/4 TRS phone connections

### Directivity




### Frequency Response



This equipment complies with the EMC Directive 89/336/EEC

### Dimensions

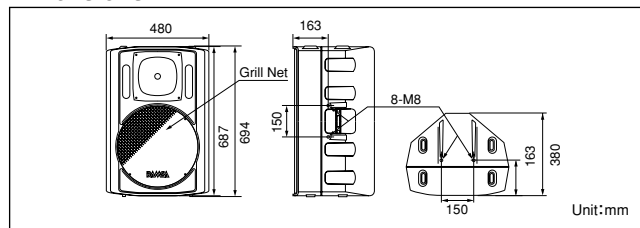

### SPECIFICATIONS

Speaker Type	2-way, bass-reflex
Input Impedance	8 Ω
Power Handling Capacity	200 W (RMS EIA-RS426A), 400 W (continuous program)
Sensitivity	99 dB (1 m/1 W)
Frequency Response	70 Hz~18 kHz
Crossover Frequency	2,200 Hz
Drivers	LF :38cm (15") woofer HF : 60° x 40° SCWG horn /compression driver
Dispersion	60° (horizontal) x 40° (vertical)
Dimensions	694 (H) x 480 (W) x 380 (D) mm
Weight (approx.)	26kg
Input Terminal	1/4 TRS phone connector Neutrik Speakon™ connector
Mounting Hardware	Forged Eye Bolts

Effective power measured by the test method prescribed by EIA (Electronic Industries Association) RS-426-A (1980). (The test signal is white noise passed through a RC high pass filter with a time constant of 4 msec. and a RC low pass filter with a time constant of 5 msec.)

38cm(15") Subwoofer

## WS-AT350



### Input terminals



(Parallel Neutrik Speakon™ and 1/4 TRS phone jack input connectors)


- 38cm(15") bass reflex subwoofer
- High power handling capacity (400 watts RMS)
- Response down to 30 Hz
- Has both Neutrik Speakon™ and 1/4 TRS phone connections
- Designed to compliment WS-AT300 in sound quality and design

### Digital Multi Processor WZ-DM35




option

### Frequency Response



This equipment complies with the EMC Directive 89/336/EEC

### Dimensions

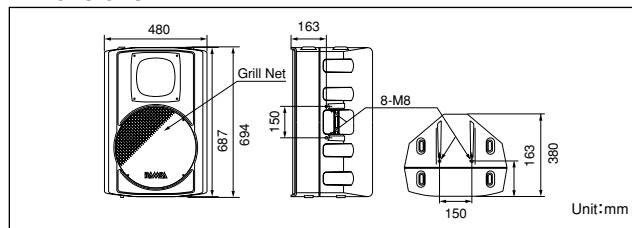

### SPECIFICATIONS

Speaker Type	Bass-reflex type
Input Impedance	8 Ω
Power Handling Capacity	400 W (RMS EIA-RS426A)
Sensitivity	92 dB (1 m/1 W)
Frequency Response	30 Hz~1.4 kHz
Crossover Frequency	
Drivers	LF : 38cm (15") woofer
Dispersion	
Dimensions	694 (H) x 480 (W) x 380 (D) mm
Weight (approx.)	26.5kg
Recommended Processor	WZ-DM35 (option)
Input Terminal	1/4 TRS phone connector Neutrik Speakon™ connector
Mounting Hardware	Forged Eye Bolts

Effective power measured by the test method prescribed by EIA (Electronic Industries Association) RS-426-A (1980). (The test signal is white noise passed through a RC high pass filter with a time constant of 4 msec. and a RC low pass filter with a time constant of 5 msec.)